



HOW THE CONSTRUCTION CRANE WORKED

Bridge segments were lifted into position by a moveable crane, called an erection truss, that was repositioned after each span was completed. This procedure was used after the 2004 crane accident.

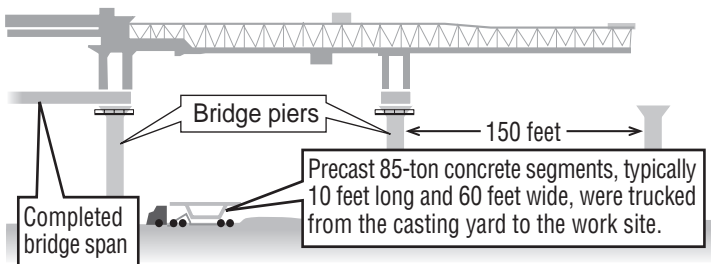

The crane lifted the segments off the truck and transported them into position.

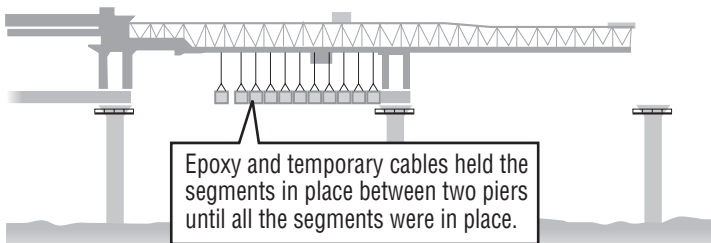

Permanent tensioning cable was strung through the segments once all were in place.

